


## Wafer Type Butterfly Valve



### TECHNICAL FEATURES

Max. working pressure	16 bar
Max. working temperature	80°C (NBR) 120°C (EPDM) 180°C (VITON)
Mounting flange acc. to	ISO 5211
Face to face dimension to	ISO 5752
Flange connection	PN 10/PN 16/ANSI 150

NR	QTY	Part name	Material
8	1	Support bearing	PA66
7	1	Cover plug	PA66
6	1	Cil.Pin.	Monel K500
5	2	Bearingbush	EN1982-CuSn7ZnPb
4	1	Lining rubber	NBR or EPDM or Viton
3	1	Shaft	EN10088-3 -1.4122
2	1	Disc	BS1400-AB or EN10213-4 -1.4408
1	1	Body	EN1563-JS1030 or ASTM A216-WCB

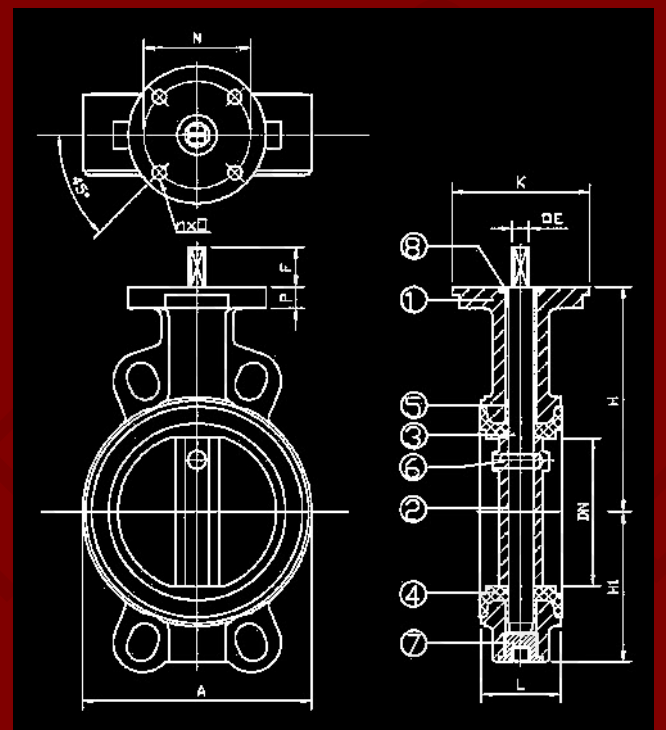

### DIMENSIONS

DN (mm)	ØA (mm)	□E (mm)	F (mm)	H (mm)	H1 (mm)	ØK (mm)	L (mm)	N (mm)	n x □	P (mm)
50	90	11	25	118	67	90	43	70	4xØ9	12
65	105	11	25	126	74	90	46	70	4xØ9	12
80	124	11	25	133	82	90	46	70	4xØ9	14
100	150	11	25	147	100	90	52	70	4xØ9	14
125	182	14	28	160	112	90	56	70	4xØ9	14
150	210	14	28	180	134	90	56	70	4xØ9	14
200	265	17	28	204	159	90	60	70	4xØ9	14
250	315	22	30	245	195	125	68	102	4xØ11	15
300	371	22	30	270	220	125	78	102	4xØ11	15